



FEATURES:

- High quality bronze body
- Rising stem with threaded bonnet

MATERIAL SPECIFICATION

| Description | Material |
|--------------|------------------|
| Body | Bronze CC491K |
| Bonnet | Bronze CC491K |
| Stem | DZR Brass CW602N |
| Packing Nut | Brass CW617N |
| Packing | PTFE |
| Disc (½-1") | DZR Brass CW602N |
| Disc (1¼-2") | Bronze CC491K |
| Handwheel | Aluminium |

PRESSURE / TEMPERATURE RATING

16 Bar from -10°C to 100°C

7 Bar at 170°C

HYDROSTATIC TEST PRESSURE

Shell: 24 bar

Seat: 17.6 bar


SPECIFICATION

Designed to BS 5154

Threaded bonnet

Rising Stem

Taper threaded to BS EN 10226-2 (ISO-7) formerly BS 21

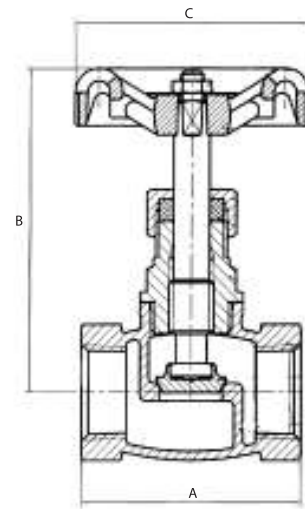

DIMENSIONS & WEIGHT

| DN | Inches | A (mm) | B (mm) | C (mm) | Weight (kg) |
|----|--------|--------|--------|--------|-------------|
| 15 | ½ | 49 | 71 | 52 | 0.24 |
| 20 | ¾ | 56 | 73 | 60 | 0.34 |
| 25 | 1 | 66 | 87 | 65 | 0.51 |
| 32 | 1¼ | 74 | 95 | 70 | 0.70 |
| 40 | 1½ | 85 | 110 | 78 | 1.03 |
| 50 | 2 | 100 | 124 | 92 | 1.59 |

All dimensions are nominal (indicative). Actual dimensions may vary.

